



LEVO

SCISSOR LIFT CATALOGUE



AERO SERIES



CE EN 280:2012 CERTIFIED
AN92.2 CERTIFIED

HIGHLIGHTS

- Double driving efficiency
- Large platform capacity for different working conditions
- Multi-disc braking, flexible maneuvering

LOW MAINTENANCE COST

- Universal and modular design, easy maintenance
- Swing out trays of batteries and hydraulic system,
- More durable, stable and safe

STANDARD CONFIGURATIONS

Folding Guardrails	Platform Self-locking Door	Safety Arm
Emergency Stop	Charging Protection	Emergency Descent
Hour Meter	Pothole Protector	Proportional Control
Flashing Beacon	Automatic Braking System	Tilt Sensor
Self-diagnosis	Forklift Hole	Full Height Drive
Extension Platform	Motion Alarm	Horn

OPTIONAL

- AC Power to the Platform
- Air Pipe to the Platform



FINANCE AVAILABLE



ON-SITE ASSISTANCE
PLUS SERVICE
PACKAGES





EASY AVAILABILITY
OF SPARE PARTS



PAN - INDIA PRESENCE



MODEL		AERO 8	AERO 10	AERO 12	AERO 14	AERO 16
Max. Working Height	m	7.8	9.9	11.8	13.8	15.7
A-Max. Platform Height	m	5.8	7.9	9.8	11.8	13.7
B-Platform Length	m	1.63	2.26	2.26	2.26	2.64
C-Platform Width	m	0.74	0.81	1.12	1.12	1.12
Extension Size	m	0.9	0.9	0.9	0.9	0.9
D-Heights (rails up)	m	2.17	2.36	2.51	2.62	2.62
Heights (rails down)	m	1.83	1.96	1.96	2.09	2.1
E-Length (with ladder)	m	1.86	2.43	2.49	2.49	2.84
F-Overall Width	m	0.76	0.81	0.81	1.19	1.25
G-Wheel Base	m	1.32	1.87	1.87	1.87	2.22
Tyres Type		Non-marking	Non-marking	Non-marking	Non-marking	Non-marking
PERFORMANCE						
H-Clearance (stowed)	m	0.08	0.1	0.1	0.1	0.1
I-Clearance (raised)	m	0.02	0.02	0.02	0.02	0.02
Platform Capacity	kg	230	230	320	320	250
Extension Capacity	kg	113	113	113k	113	113
Max. Occupancy	person	2	2	2	2	2
Max. Drive Speed (stowed)	km/h	4	3.5	3.5	3.5	3.5
Drive Speed (raised)	km/h	0.8	0.8	0.8	0.8	0.8
Turning Radius	m	1.55	2.2	2.3	2.3	2.3
Up/Down Time	s	16/34	31/40	62/39	65/60	80/60
Gradeability	%	25	25	25	25	25
Max. Slope (front/back)	degree	3	3	3	3	3
Max. Slope (side/side)	degree	1.5	1.5	1.5	1.5	1.5
Control		Proportional	Proportional	Proportional	Proportional	Proportional
POWER						
Drive		FWD	FWD	FWD	FWD	FWD
Multi Disc Brake		Front	Front	Front	Front	Front
Max Wind Speed	m/s	12.5	12.5	12.5	12.5	12.5
Tyre Dimensions	mm	305x100	381x127	381x127	381x127	381x127
Batteries	V/Ah	4X6V/200	4X6V/200	4X6V/200	4X6V/200	4X6V/200
Charger	V/AC	100-240	100-240	100-240	100-240	100-240
WEIGHT						
Weight	kg	1573	2257	2840	3045	3530

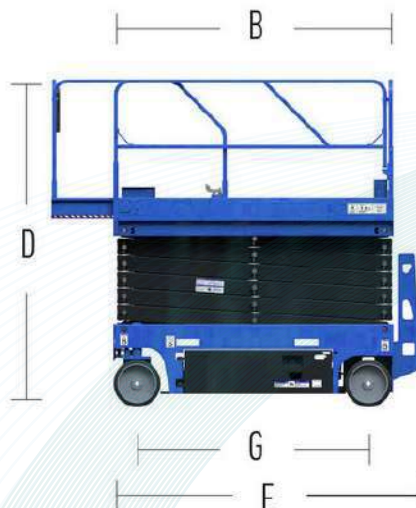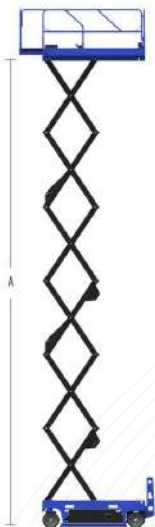

**Head Office**

Gemini House,
Bus Depot Lane,
Deonar, Mumbai,
Maharashtra
400088

Factory

22WJ+JMX, S Central
Rd, MIDC Industrial
Area, Shiravane,
Nerul, Navi Mumbai,
Maharashtra 400706

Contact

+91 9833249787

Email

info@geminiindia.com



Dealer queries
welcome!

