




AGCJI

Electrically Insulated Articulating Boom Lift

HIGHEST SELF-PROPELLED ELECTRICALLY INSULATED ARTICULATING JIB BOOM

Electrically insulated aerial work platforms are used where electrocution hazards exist, such as working on, or near any type of electrical wiring, cables or poles. Electrically insulated aerial lifts can be utilized where Bucket Trucks are currently used but provide a different level of capability.

Our electrically insulated aerial lifts allow for you to move the machine when the bucket is elevated and work is being done around electrical hazards, trees, plants and construction sites. Moving from one work location to another work location while elevated will save your crew time and provide an optimal amount of safety around electrical hazards.

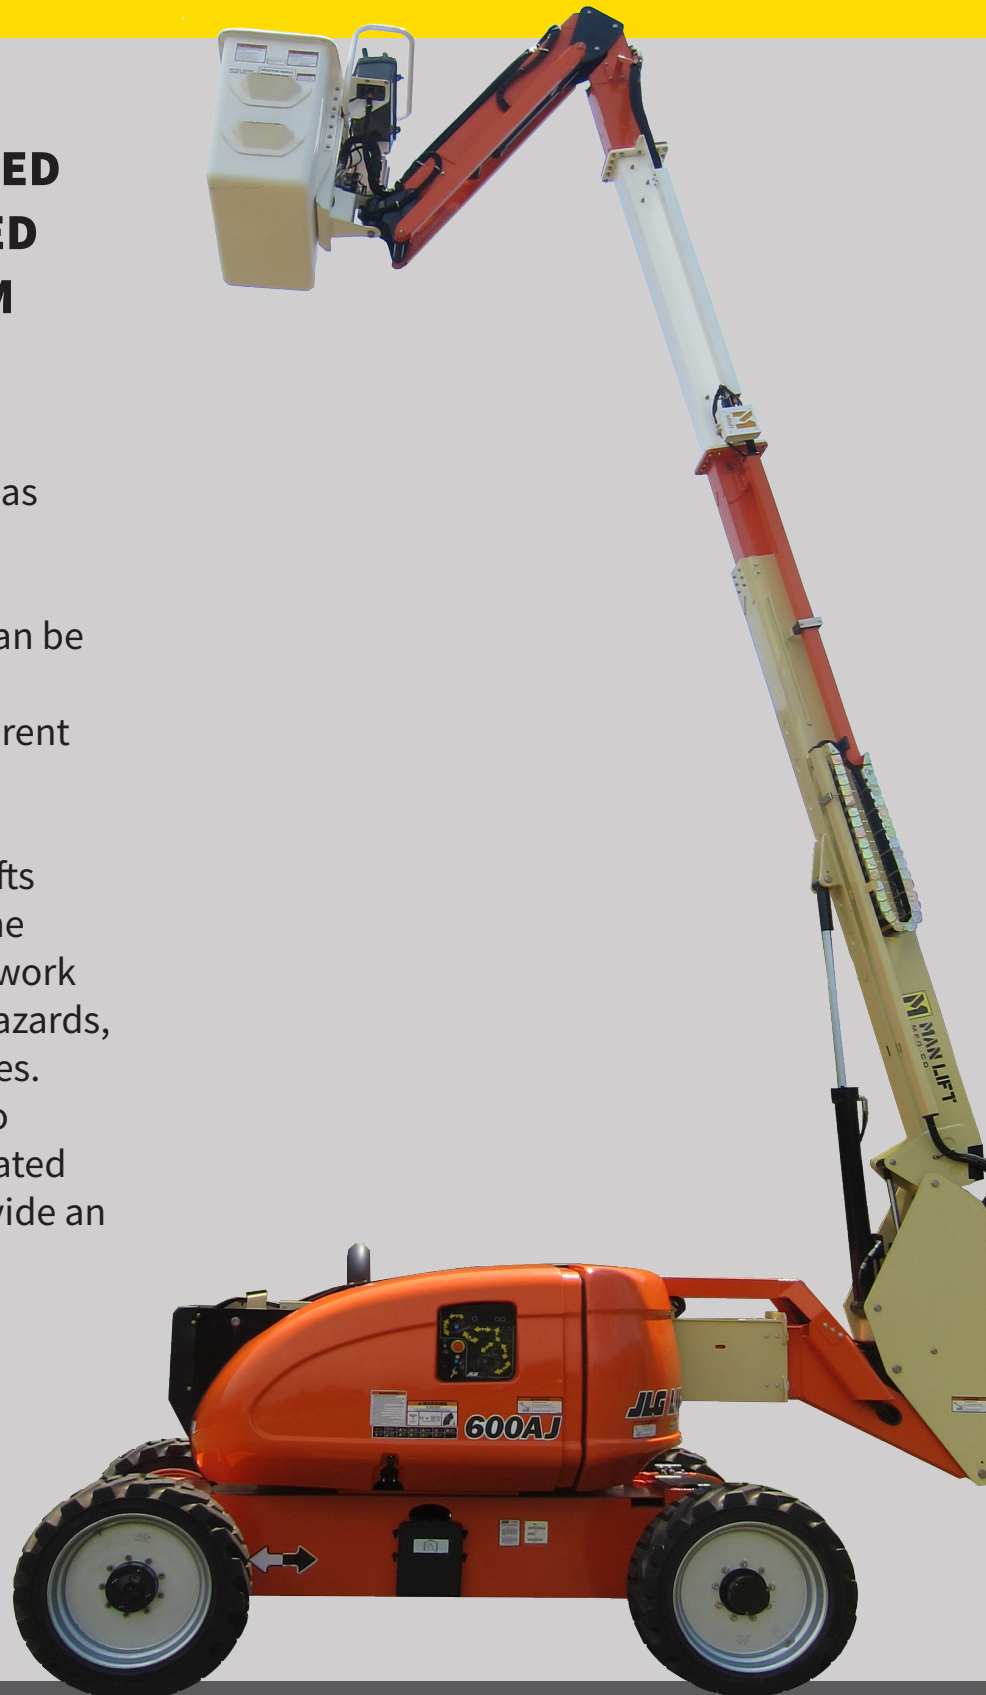


A60Ji ELECTRICALLY INSULATED ARTICULATING BOOM LIFT

SPECIFICATIONS

Working Height	63' 2"	19.26 m
Platform Height	55' 8"	17 m
Up and Over Height	26' 7"	8.14 m
Platform Size (inside)	26" x 48"	0.66 x 1.2 m
Platform Capacity	500 lbs	272 kg
Overall Width	8' 2"	2.49 m
Stowed Length	36' 9"	11.24 m
Stowed Height	9' 6"	2.92 m
Jib Length	72"	1.83 m
Horizontal Reach	34' 3"	10.45 m
Outside Turning Radius	17' 8"	5.43 m
Drive Speed	4.25 mph	6.84 km/h
Horizontal Platform Rotation	180°	
Vertical Jib Rotation	130° (+70°, -60°)	
Ground Clearance (Axle)	11.7" / 0.29 m	
Turret Rotation	360°	
Engine Type	Diesel	
Platform Rotation	180°	
Gradeability	2WD-30%, 4WD-45%	
Swing	360° Continuous	
Drive Type	2WD or 4WD (optional)	

Specifications Subject to Change

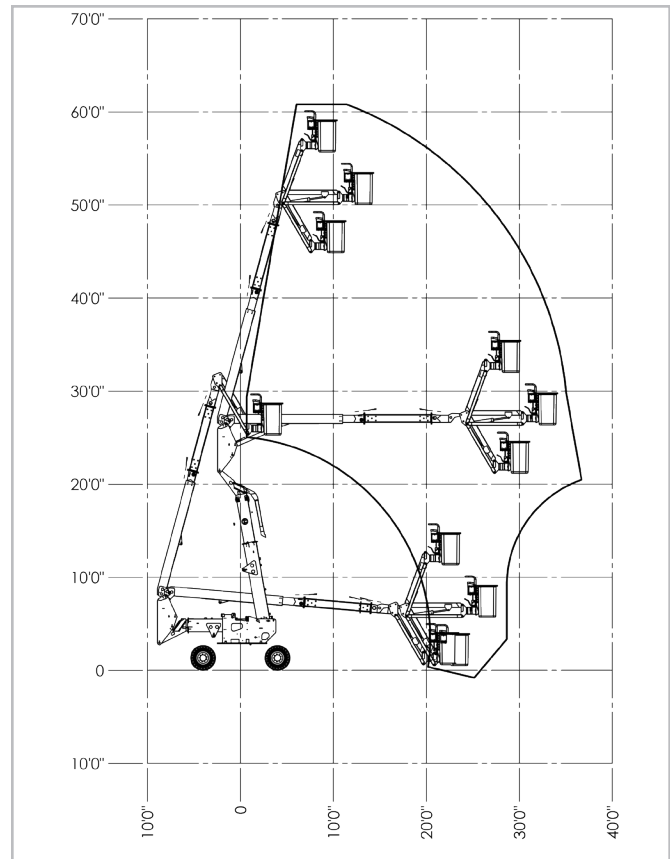

SAFE.

- 46kV electrically insulated
- ANSI 92.2 46kV category "C" rating
- Fiberglass boom section
- 2-Person Fiberglass bucket with liner
- Fiber optic module controls
- Non-conductive hydraulic hoses
- Fall Protection

PRODUCTIVE.

- 55' 8" Platform Height
- 63' 2" Working Height
- 26" x 48" Platform Size
- 11.7" Ground Clearance
- 500 lb Platform Capacity
- Diesel Engine
- 12V DC Battery
- Factory controls retained for operator ease of use

INNOVATIVE.

- Customer and market driven design in response to real industry challenges
- Wireless Bluetooth platform controls
- 6' Articulating Jib
- Optional 2WD or 4WD